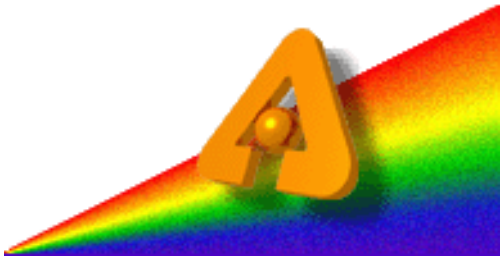

Advanced Photon Source Upgrade Path

Defining the State-of-the-Art

Presented to BESAC Subcommittee on 20-year Facilities Roadmap

February 23, 2003

By J. Murray Gibson

APS Today

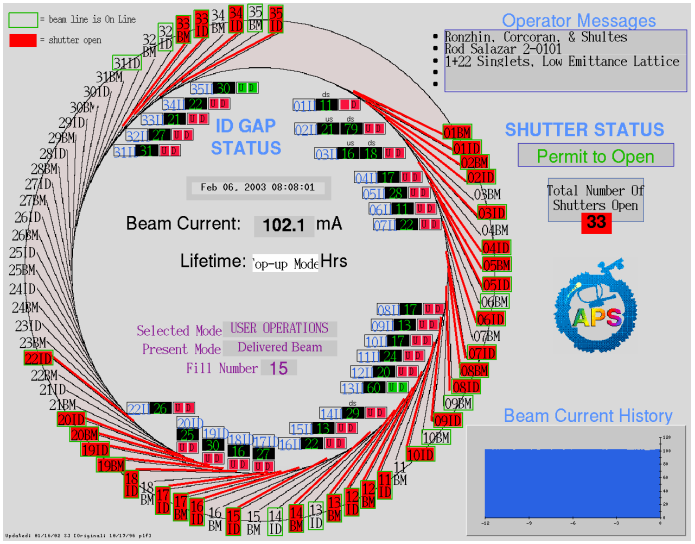

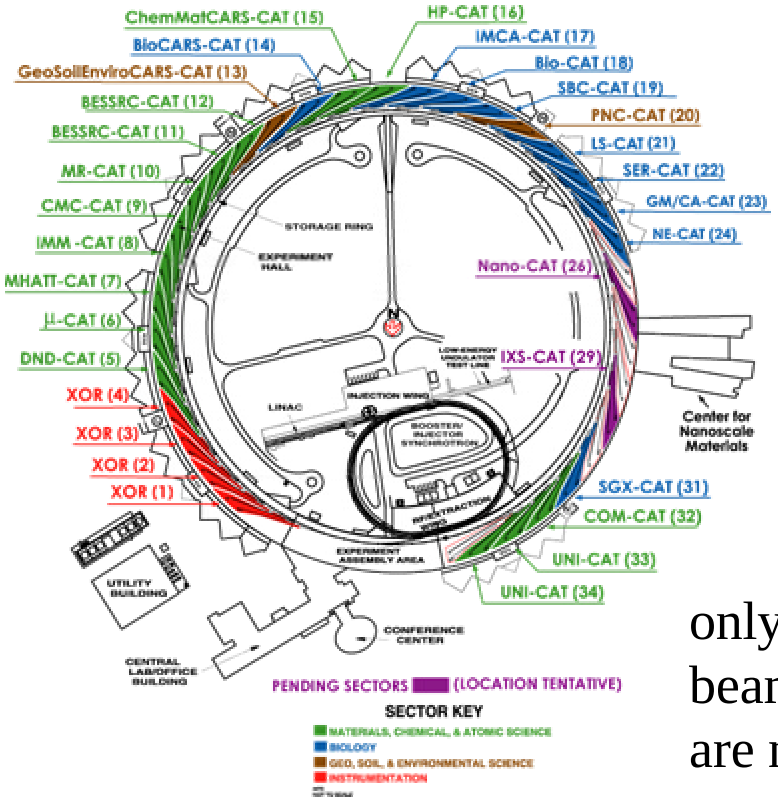

only 4 ID beamports are not yet committed

38 functioning beamports (25ID, 13BM)
68 total available

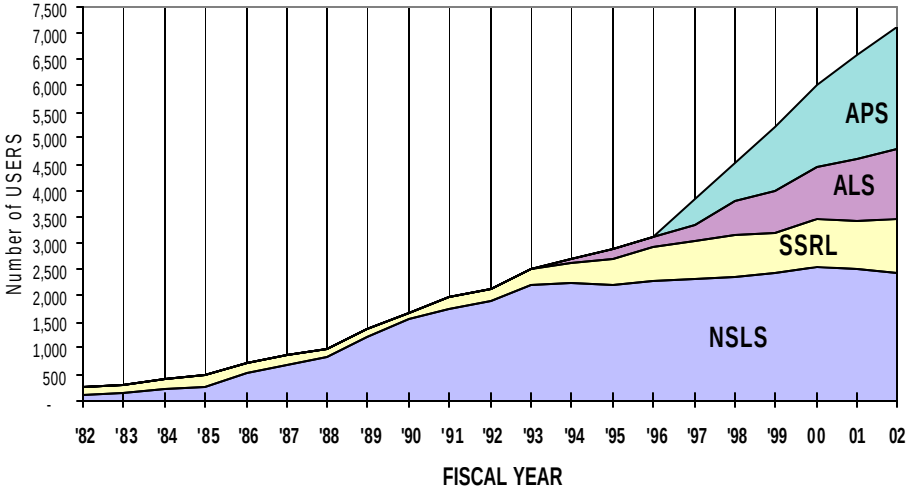

APS user community to reach ~10,000 in a decade

State-of-the-Art 3rd Generation Science in 20 Years?

- *Individual* nanoscale objects can be observed in *real-time*
- Electronic, dynamic and magnetic properties of a *single nanostructure* can be measured
- *A few atoms* can be chemically identified
- A full dataset for protein structure analysis can be collected in *less than a second*
- X-ray imaging of objects with *nm resolution* is routine

History of Innovation

- Top-up operation

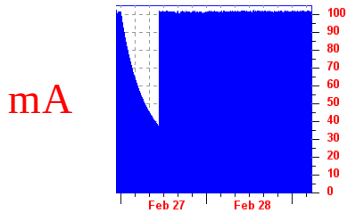

–Low emittance

–Stable optics

- Improved beam stability

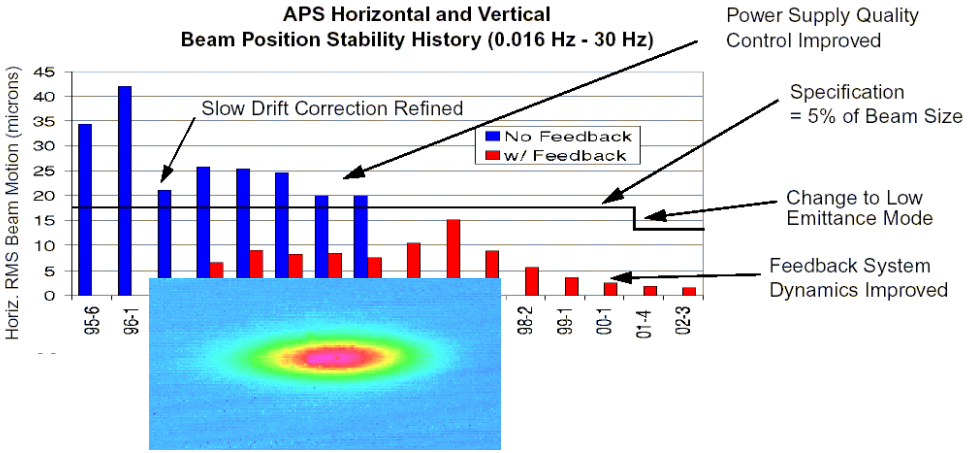

Canted
Undulators

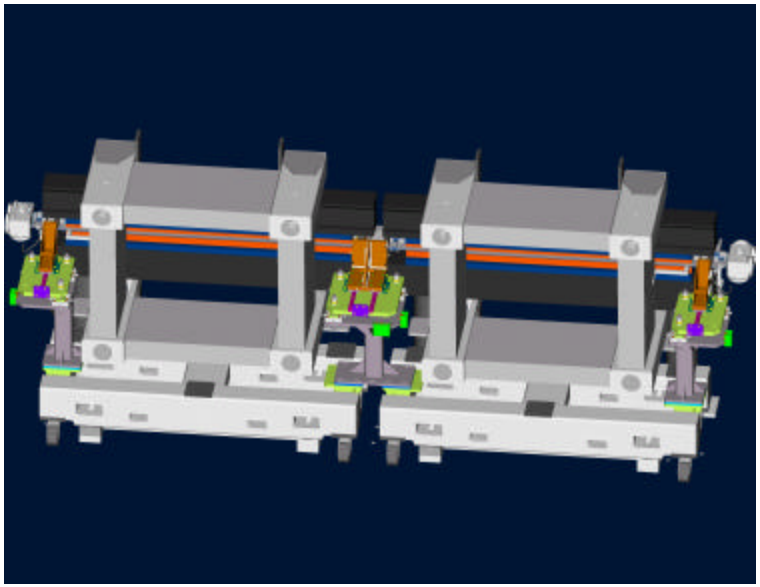

- driven by bio users

Guiding principles for next 20 years

- The mission of the Advanced Photon Source is to deliver world-class science and technology by operating an outstanding synchrotron radiation research facility accessible to a broad spectrum of researchers
- Need for 3rd Generation Sources will not go away in 20 years, and our user base will grow to ~10,000
  - 4th generation is revolutionary, but does not supercede 3rd generation
- Our users and staff should be connected with the next generation capabilities
  - short pulses (fs), higher coherence.
- APS capabilities must increase continually
  - over 1000 times improvement in “useable” brilliance possible within 20 years
- Maintain strong partnerships (such as CATs), and open access for general users

Defining the state-of-the-art in 3rd generation x-ray sources and science

APS phases of innovation in the next 20 years

- Phase I – Maximizing Beamline Operations
- Phase II – Maximizing Source Capabilities
- Phase III – Next Generation Facility
- Phase IV – Super Storage Ring

  – Phases II, III and IV each represent at least an order of magnitude increased useable brilliance

APS Upgrades Timeline

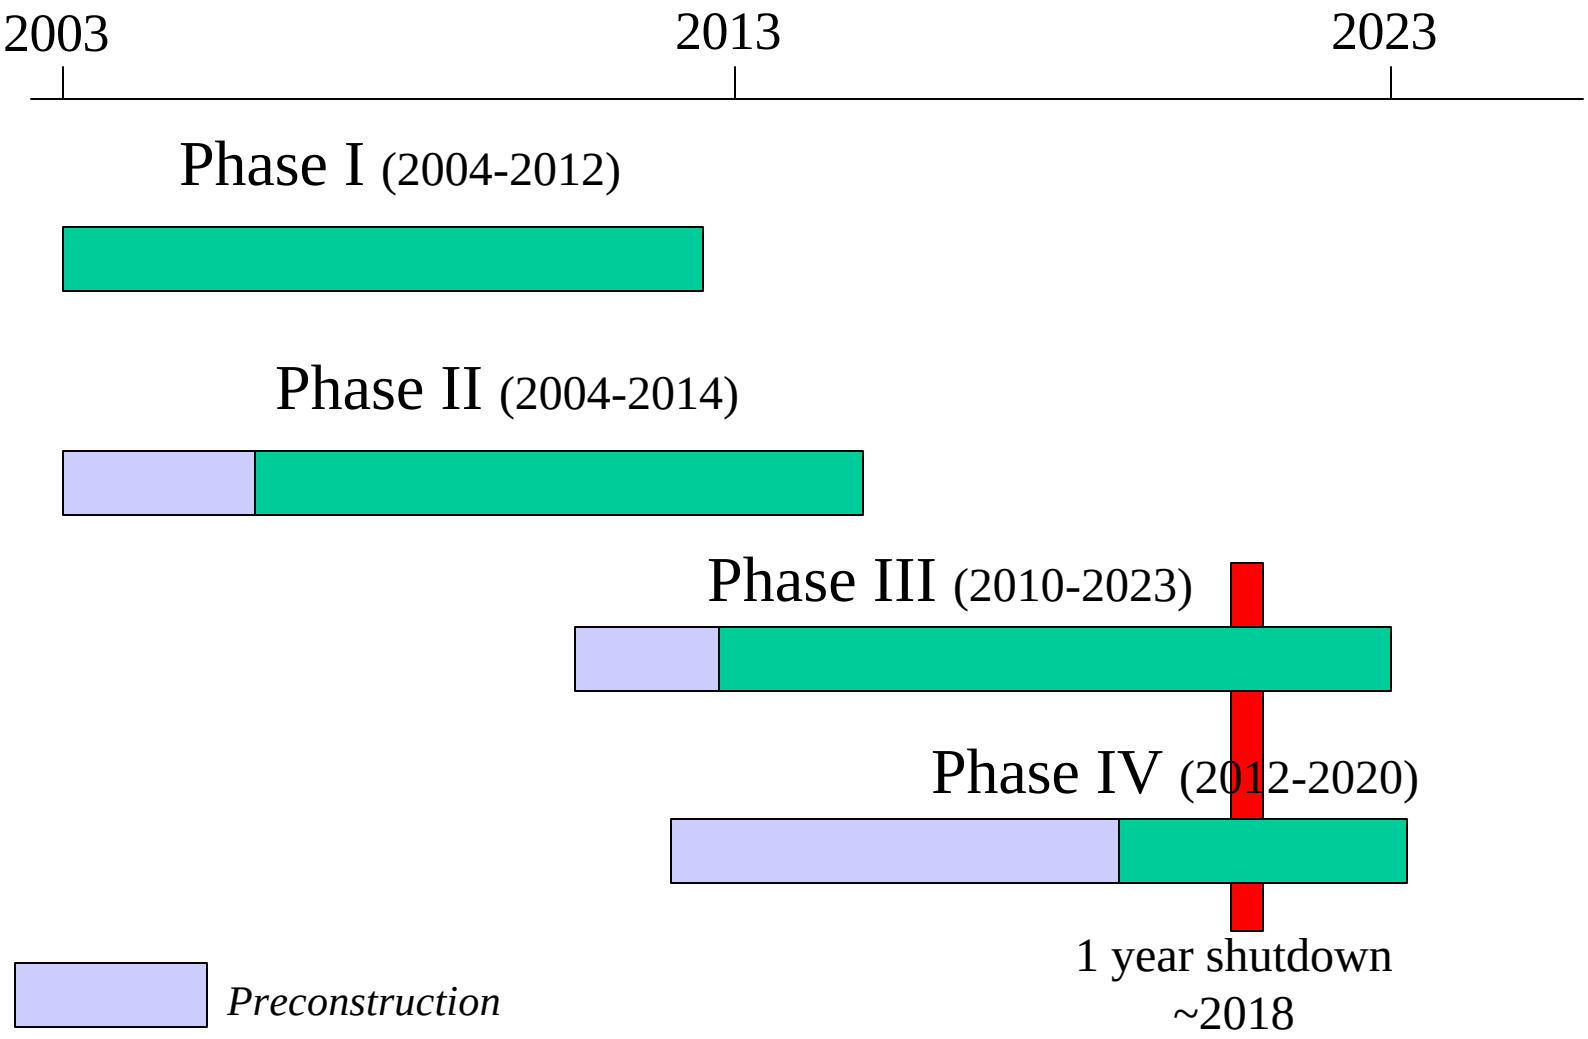

Phase I – Maximizing Beamline Operations (2004-2012)

- 10 beamlines to be constructed in the next 8 years (5 years per beamline)
  - more than 1 beamline possible per beamport
- 10 beamlines to be upgraded
  - most likely BES sectors (~26 beamports)
- Construction
  - APS and partner user responsibility
- Operation
  - APS responsibility

The Importance of the Science

- New capabilities will be optimized (in parallel with optimized sources during Phase II)
- All beamlines will be well operated and accessible
- Quantity and quality of output will increase
- Science Advisory Committee oversees choices

Two kinds of beamlines:

a "turnkey" beamline to efficiently collect - SAXS

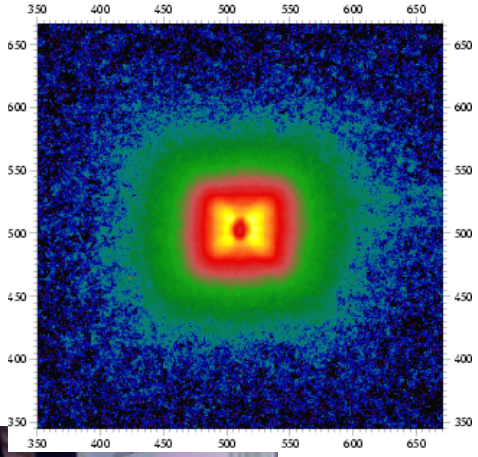

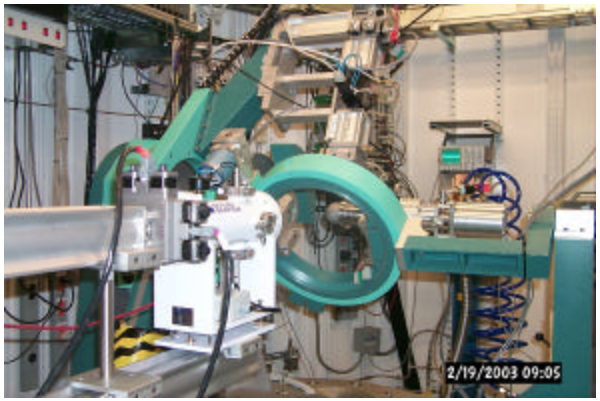

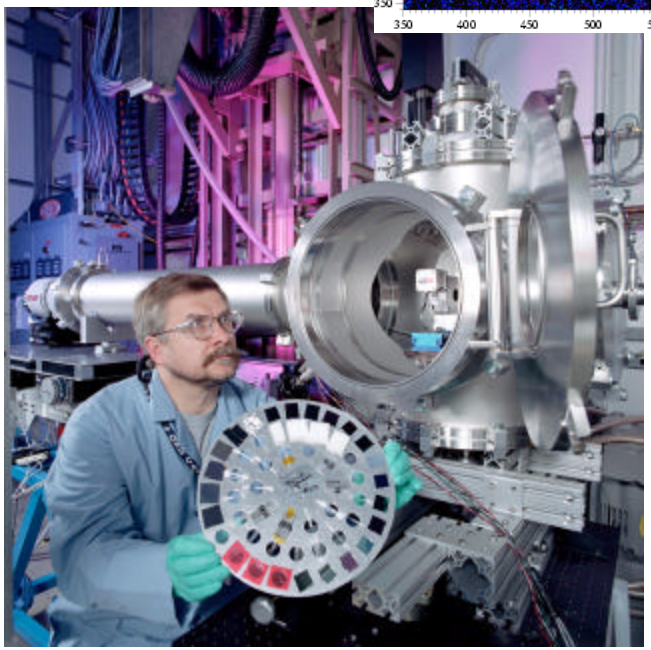

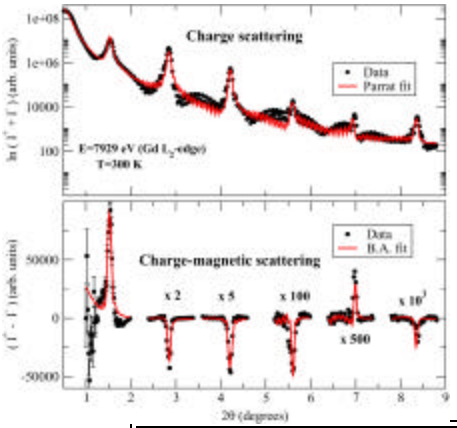

a dedicated beamline to "do experiments" - magnetic scattering

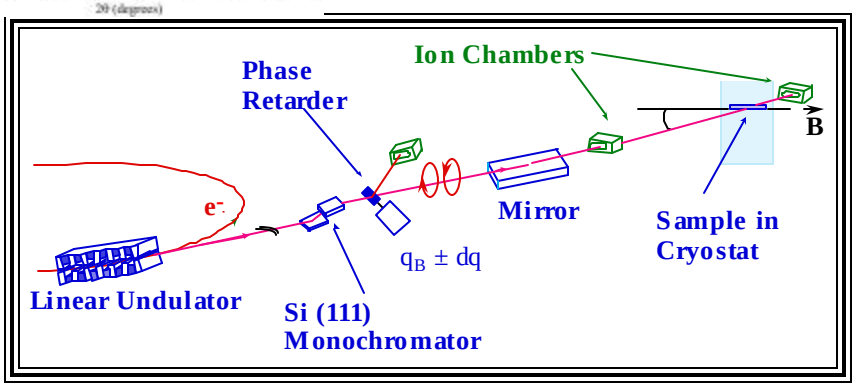

Beamline operation support leverages science

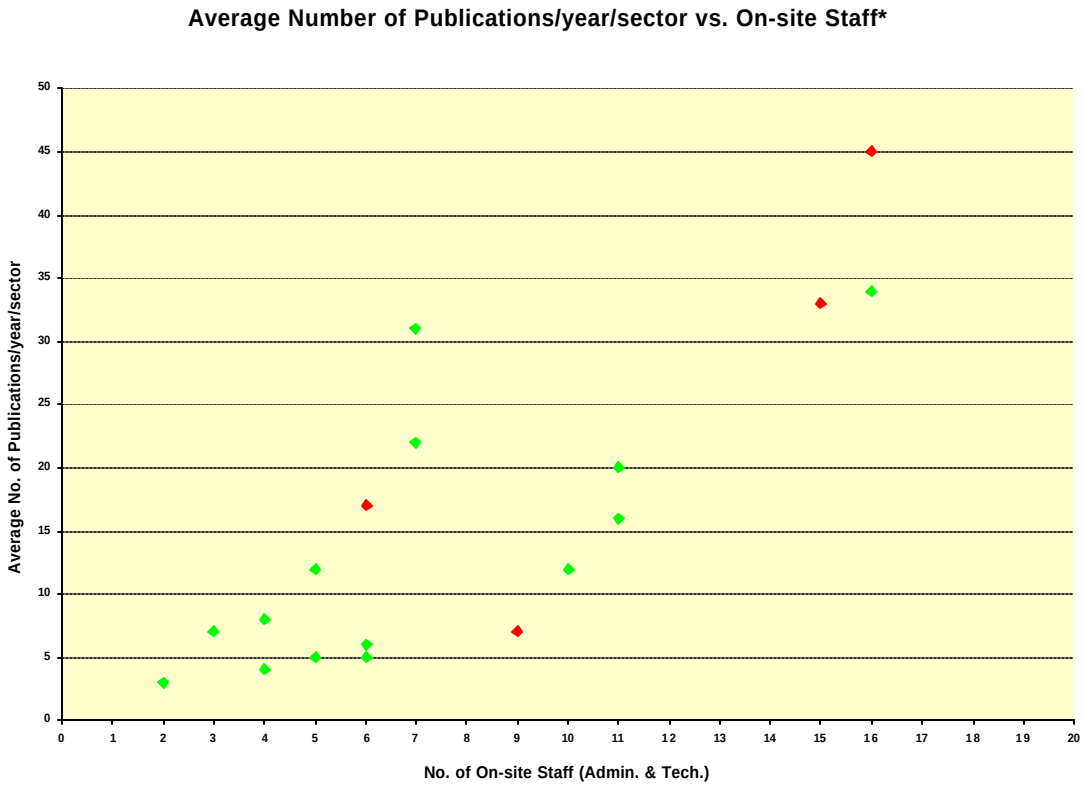

Readiness for Phase I

- Beginning now but limited by resources
- Capital resources and manpower for operations
  - our current staff level permits insertion device development and some beamline design assistance ~1/3 beamlines
  - operational staff support must grow by ~100 people (+20% current operating budget)
- Continuing incremental improvements in detectors, optics will occur during Phase I
- VUV-FEL facility is a special beamline -

APS “LEUTL” FEL beamline

- Allows accelerator physics activities such as gun development for 4th generation
  - demonstrated SASE at ~100nm
  - operates independently in non-top-up mode
- VUV-FEL user facility for ~$10M

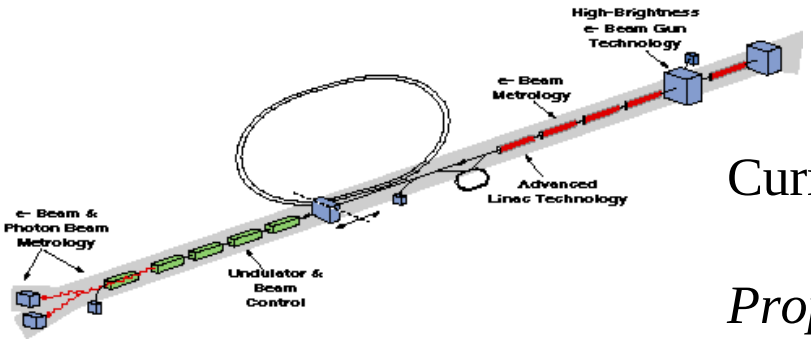

Currently serving a single user:
UV single-photon ionization
Proposed facility offers better capabilities, more users and complete independence from SR

Phase I – Cost, Schedule, Scope and Management

- Estimated cost $160M over 8 years
  - average 2-3 new beamlines per year, up-front weighting on new beamlines
- Funds for new instruments should be ½ inside, ½ outside facility (for partnering)
  - With research funds outside
- Operational funds should be inside facility (~$20M extra in today's dollars)
- SAC role, external peer review also on partner proposals

Phase II – Maximizing Source Capabilities (2004-2014)

- Innovative undulators, front ends and related components
- Higher brilliance, optimized for application
- Improve front ends and high-heat load optics for higher current operation
  - APS operates at 100mA, would reach 300mA at end of Phase II
- Increasing brilliance by more than an order of magnitude
- Continuing accelerator improvement
  - even greater improvement beam stability

Science Example -Extended straight section and inelastic x-ray spectroscopy

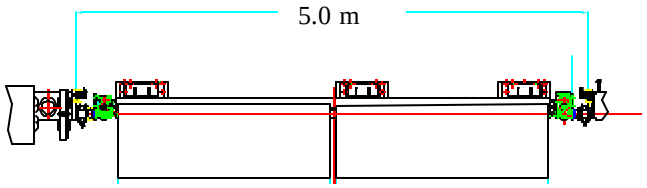

CURRENT STRAIGHT SECTION

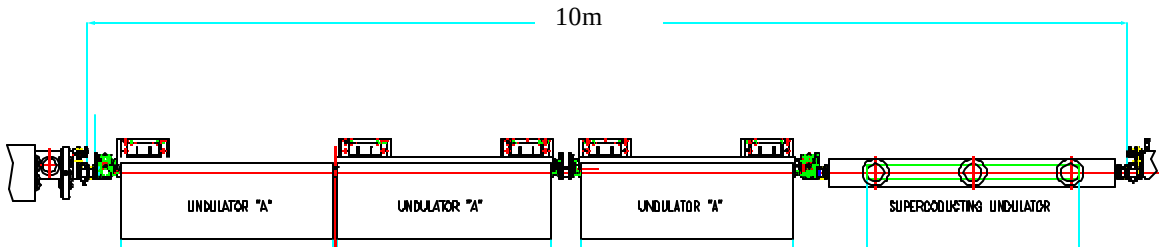

PROPOSED EXTENDED STRAIGHT SECTION

LONG STRAIGHT SECTION WITH THREE UNDULATORS "A" AND ONE SUPERCONDUCTING UNDULATOR

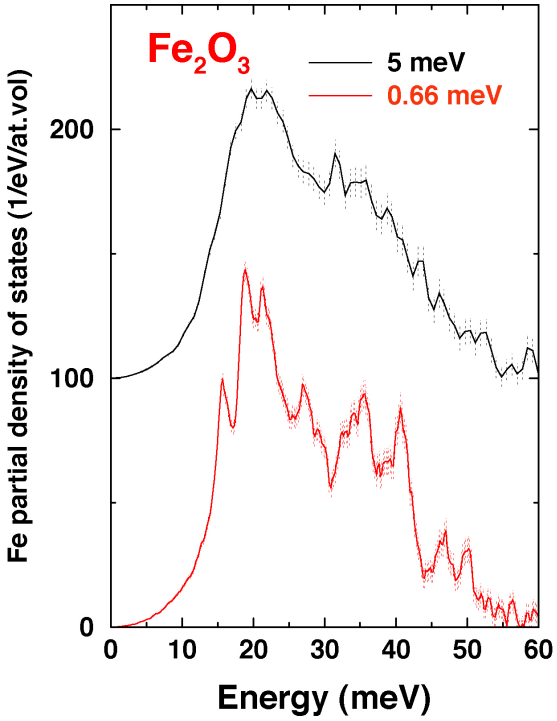

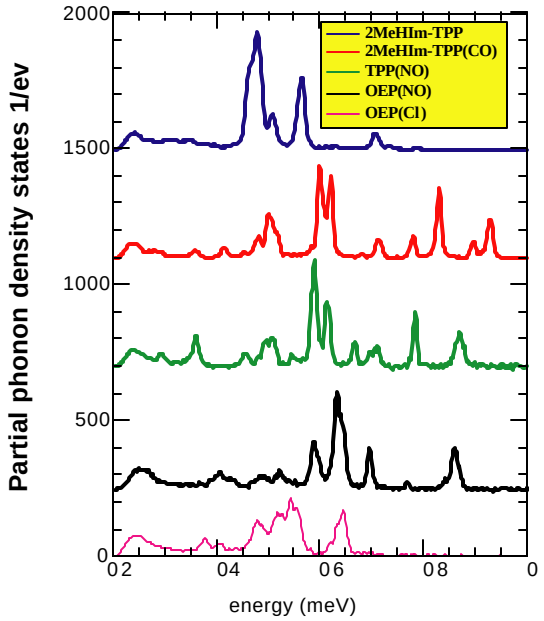

- The heme doming coordinate in myoglobin is directly involved in the oxygen-binding reaction
- Doming modes are expected in the range of 6-8 meV
- With a high enough resolution it becomes possible to study the influence of addition of ligands to the functional behavior of proteins

Science example - magnetic studies with soft x-rays
Brilliance Tuning Curves for Elliptically Polarized Devices

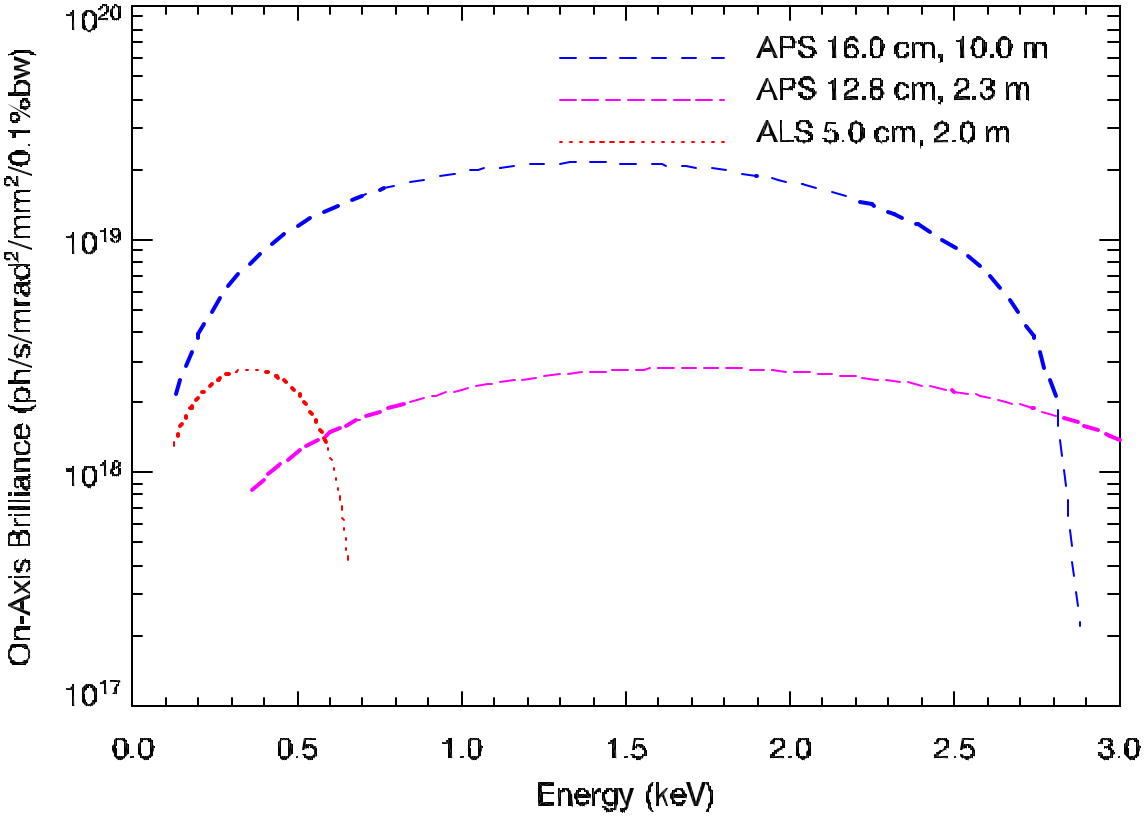

Advantages of high energy rings:

- Low emittance
- High beam stability
- Large energy tunability

⇒ **Superior performance**

APS (7 GeV, 100 mA):10 m long straight section, λ =16.0 cm, N = 62
APS (7 GeV, 100 mA):5 m long straight section, λ =12.8 cm, N = 18 (current device)
ALS (1.9 GeV, 400 mA): 2 m long straight section, λ = 5.0 cm, N = 37

Polarization-dependent spectroscopy

Helicity dependent X-ray emission provides information concerning spin polarized density of bulk occupied states

Photoemission Microscopy

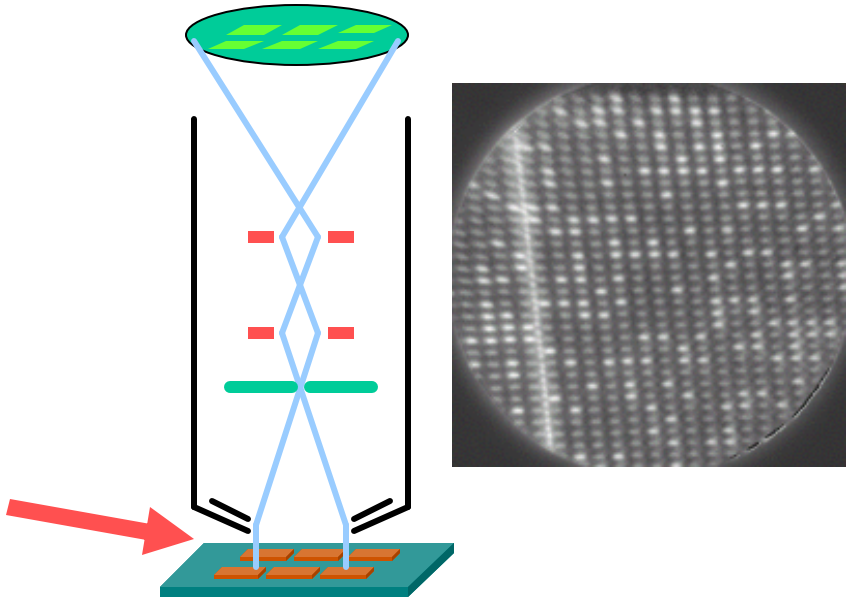

Spatial resolution target of 2 nm

- Magnetic contrast:
  - Domain imaging
  - Ground states in nanoscale systems
  - Interactions in particle arrays
  - Finite size effects
- Chemical contrast
  - Self-assembled systems
  - Segregation
  - Local electronic structure
  - Buried layers (~5 nm)
- Soft x-ray advantages:
  - High magnetic contrast
  - Access to TM, RE, semiconductors

Readiness for Phase II - *Current R&D*

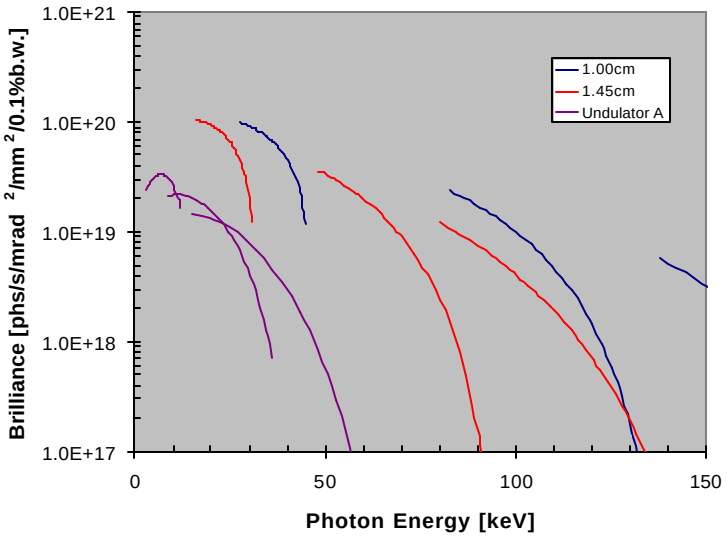

Superconducting Small Period Undulator

1.45 cm period
L=2.4 m, N=165
Gap=7 mm
Maximum K = 1.4

1.00 cm period
L=2.4 m, N=240
Gap = 3 mm
Maximum K = 1.17

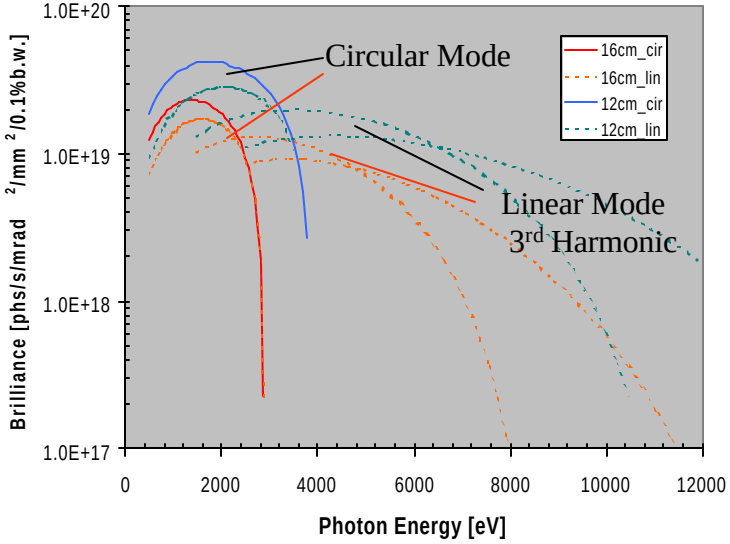

Variable Polarization Undulator

Electro-magnetic Device

λ=16 cm, L=10 m, N=62

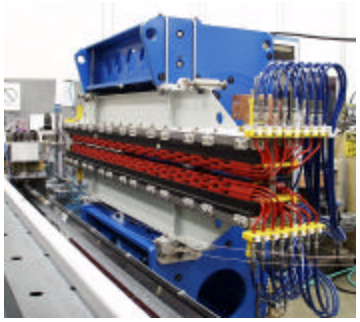

APPLE type PM Device

λ=12 cm, L=10 m, N=82

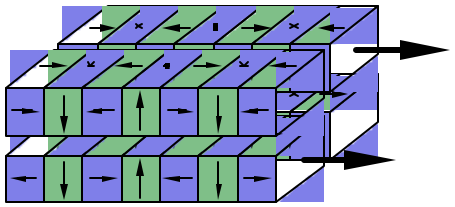

Assumed APS storage ring parameters: 3.5 nm-rad, 1% coupling, 100 mA

Phase II – Cost, Schedule, Scope and Management

- $100M over 10 years, ramping up from $5M per year in the first year, to $20M in the last year
- APS will remain at the state-of-the-art in insertion device design
  - Connection with LCLS and other 4th generation sources

Phase III – Next Generation User Facility (2010-2023)

- By 10 years from now user community will approach 10,000
- APS will be primary 3rd generation hard x-ray source, with great capabilities and easy accessibility
- Need to develop beamlines and automation to reach next level

The Importance of the Science

- Current performance is limited by beamlines – optics, detectors
  - One or two orders of magnitude improvement available in many cases
- Automation offers both remote access, better user support and new experimental capabilities

Detectors and Optics Limit Performance

Hot-rolled Al

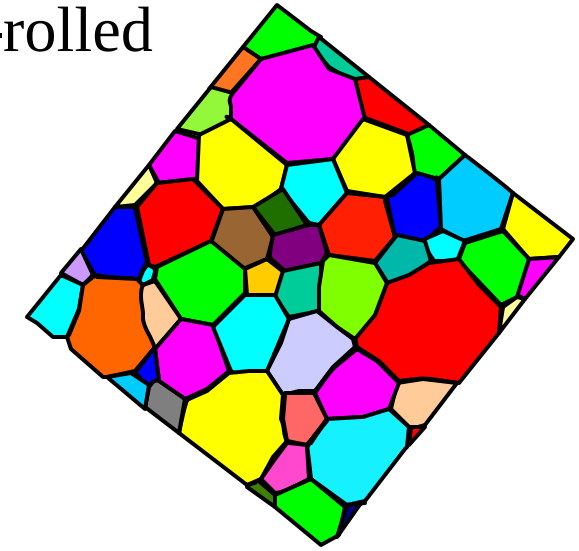

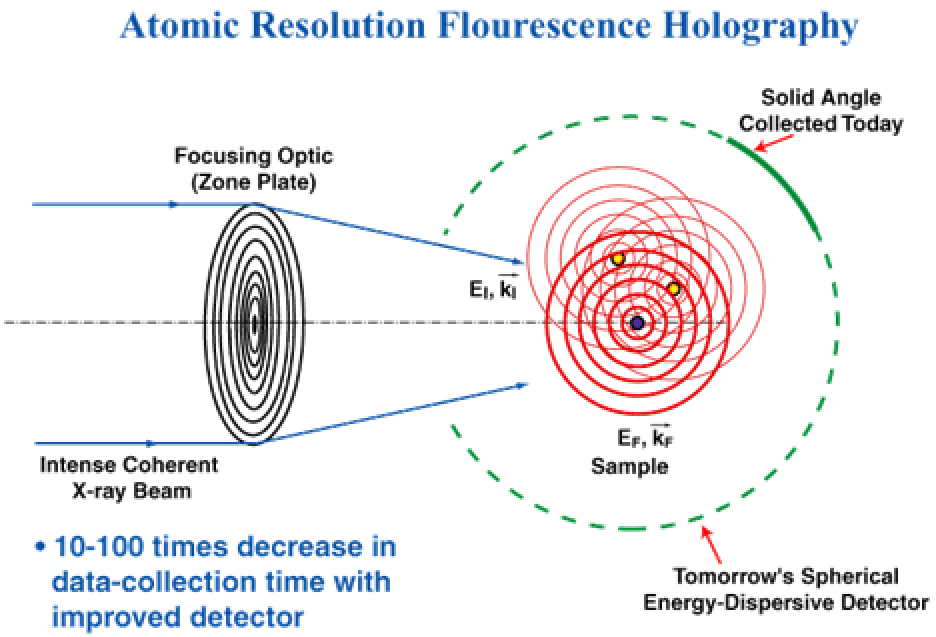

Map grain orientation and stress in real samples 10^4 μm^3 at 1 μm resolution takes 54 hours to collect data

CCD read-out time = 52 hours

Automation

- Not just remote access and user support
- Precision and control exceeds human capabilities

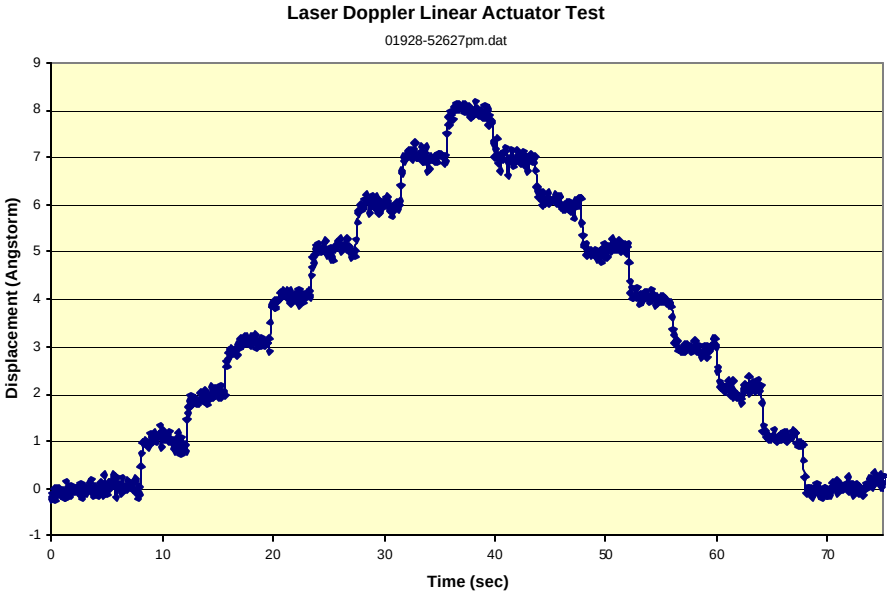

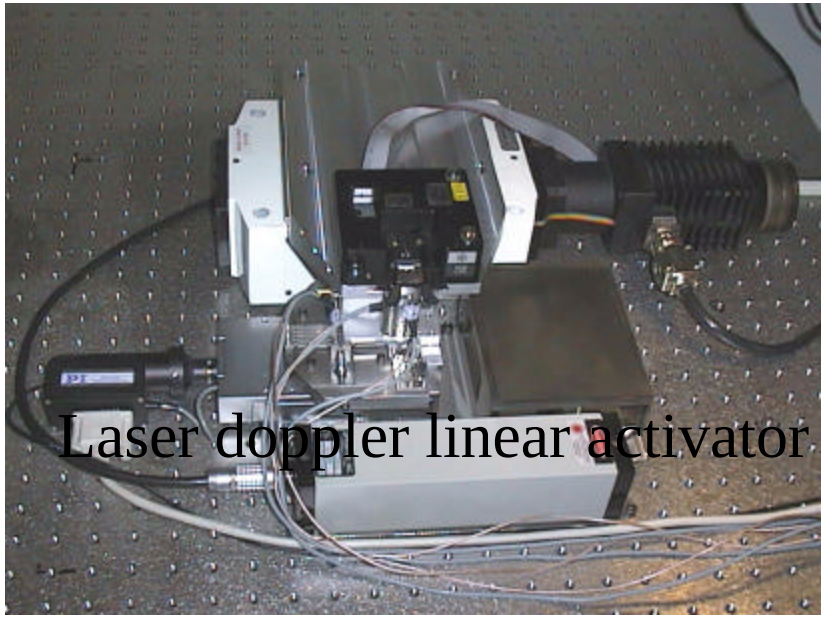

Automation leads to new science

- Nanoprobe
  - Scan real and reciprocal space in nanovolumes
- Adaptive optics with feedback
- Multi-parameter "smart" scans

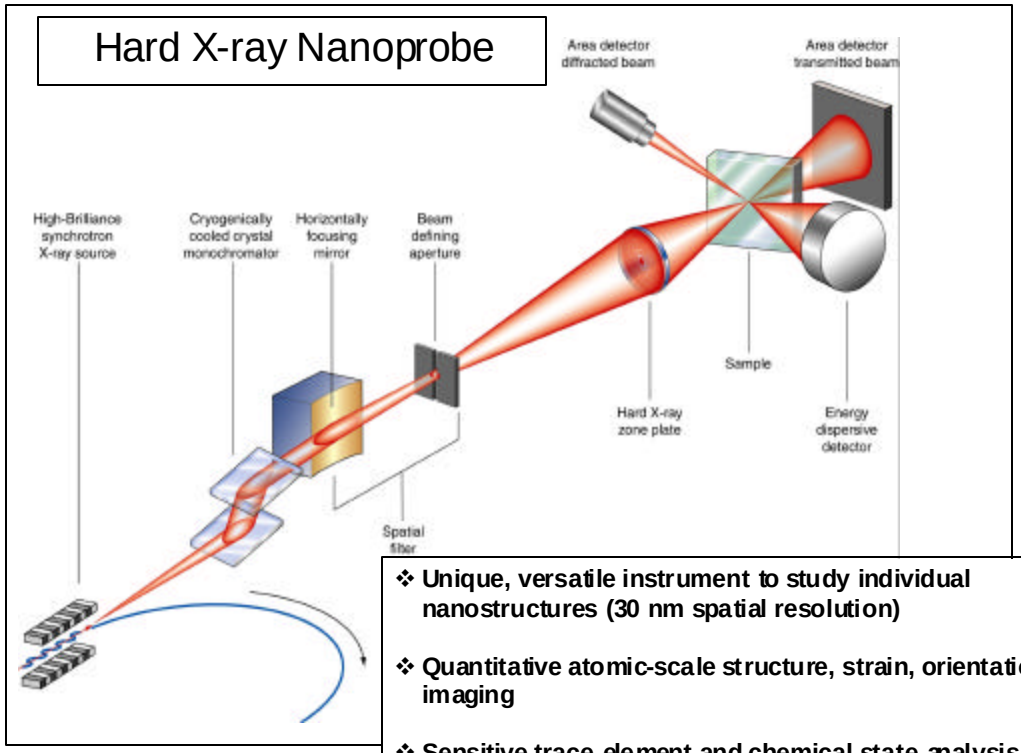

Readiness for Phase III

- This builds on Phase I and II for a complete reinstrumentation of all beamlines. Incremental developments will be going through Phases I and II. Education and outreach will be facilitated by an Institute for X-Ray Science and Technology, including a theory component.

Phase III – Cost, Schedule, Scope and Management

- Estimated cost for enhancements of beamlines is $400M
- Funding should include partner users in construction, proposals and SAC oversight
- Center for X-Ray Science and Technology involved, with partner members
- Most construction activities organized by APS, operation remains APS responsibility
- Additional $45M conventional facilities upgrades will be needed in 20-year period

Phase IV – Super Storage Ring (2012-2020)

- To upgrade user capabilities and maximize value of embedded infrastructure and community
- Reduce emittance by at least a factor of 10
  - Less than 0.3 nm-rad effective emittance
  - Very short lifetime
    - Requires refined top-up and new injector
- Beam stabilization at 10nm level
- Requires new storage ring and injector
  - New injector offers 4th generation capabilities

Preconcept stage– not yet designed

Super Ring - 80 Sector Lattice

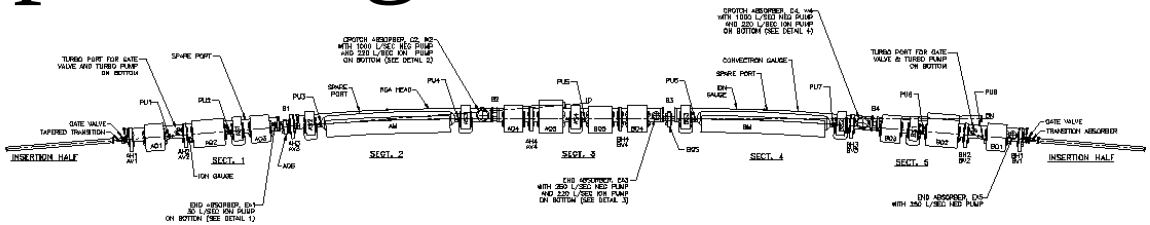

- **Flexible lattice, uses existing enclosures**
- **use existing BM ports**
- either
  - two short insertion devices (3 - 4 meters) / double sector
- or
  - one long insertion device (up to 12 meters)
  - plus one hard bending magnet source

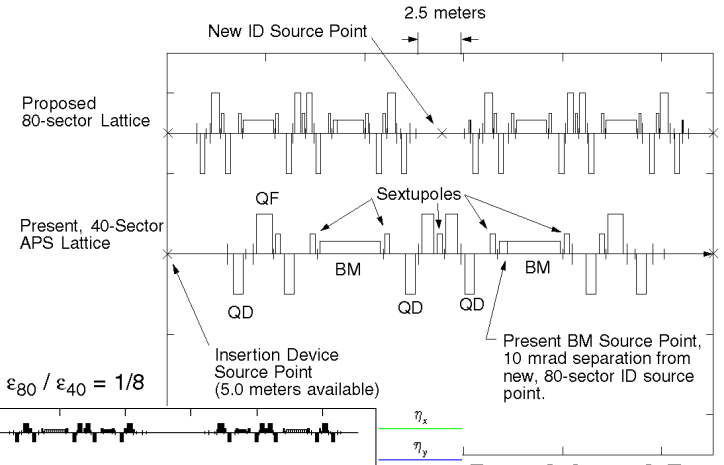

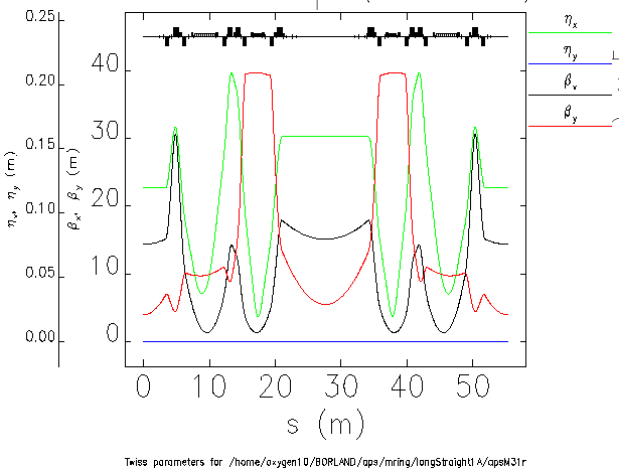

Nano-scale Beam Stabilization

Necessary in conjunction with reduced beam emittance

- Support nanoprobe experiments
- Aggressive attack on
  - noise sources, microhertz to Megahertz
  - improved instrumentation and feedback capability

New Injector Complex

- Several possibilities for injection
  - New booster
  - LINAC source
  - Need high rep rate and emittance x10 smaller than present booster

LINAC Augmented Light Source

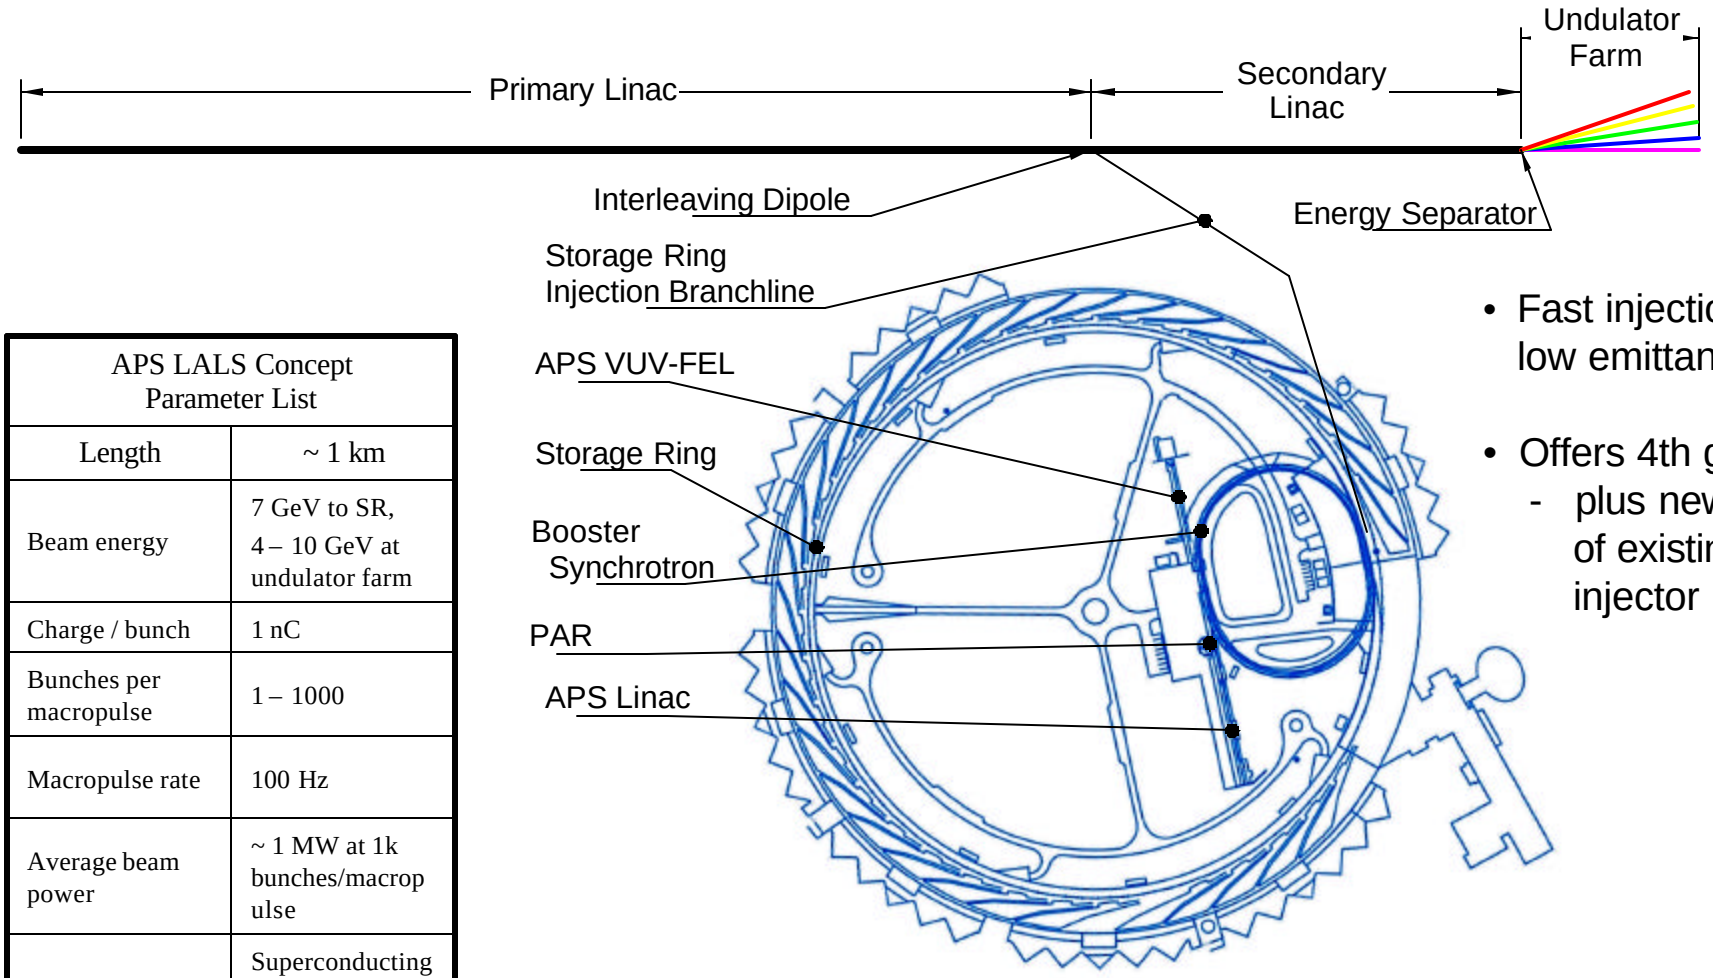

APS LALS Concept Parameter List	
Length	~ 1 km
Beam energy	7 GeV to SR, 4 – 10 GeV at undulator farm
Charge / bunch	1 nC
Bunches per macropulse	1 – 1000
Macropulse rate	100 Hz
Average beam power	~ 1 MW at 1k bunches/macropulse
RF structures	Superconducting 1.3 GHz TESLA -type
Recirculation?	Possible; not required for low beam power operation

- Fast injection, low emittance
- Offers 4th gen.
  - plus new use of existing injector (UV,IR)

Conceptual layout of a LALS at APS, approximately to scale.

Courtesy of J. Lewellen, APS/ANL

The Importance of the Science

- Offers a factor of more than 10 improved brilliance to embedded beamline and user base
- Stability will enable higher performance for nano-beams etc.
- New LINAC injector will offer 4th gen. capabilities, e.g. time resolved
  - Secondary LINAC and endstations
  - Existing injector liberated for other uses
- Possible for special operating mode giving fs pulses into storage ring experiments

Readiness for Phase IV

- In approximately 15 years, this would provide a major upgrade in capabilities
  - Unlikely that any other APS scale storage ring will be built in the foreseeable future
- Actual accelerator choices would be mandated by developments in ERL/FEL along the way
  - Could be connected to green-field FEL
  - Leverage leadership for insertion devices

Phase IV – Cost, Schedule, Scope and Management

- Estimated cost of Super Storage Ring
  - $350M
- Estimated cost of LINAC construction
  - $250M
- Alternate injector approach to replace booster much less expensive, but does not offer 4th gen. or UV/IR capabilities

How the phases are linked to the impact

- Multiple increases of more than 10x each phase in performance
  - almost 10,000 times increase in useable brilliance in 20 years
- APS will define the state-of-the-art and have a major scientific impact
- Total investment proposed is ~$1.3B over 20 years, comparable with depreciation cost of APS (operating budget in that period >$2B)

Conclusion

- Phased upgrade plan maintains APS as premier 3rd generation x-ray storage ring
  - 3rd generation sources will not be obsolete!
- Embedded capabilities and user community in 15 years leads to desire for continually improved and augmented capabilities
  - Connect with 4th-generation capabilities
- Requires increased operating budgets for operational support responsibilities (only ~20% in today's dollars)