Enclosure, EN-30100, Digital ASC for HV-901

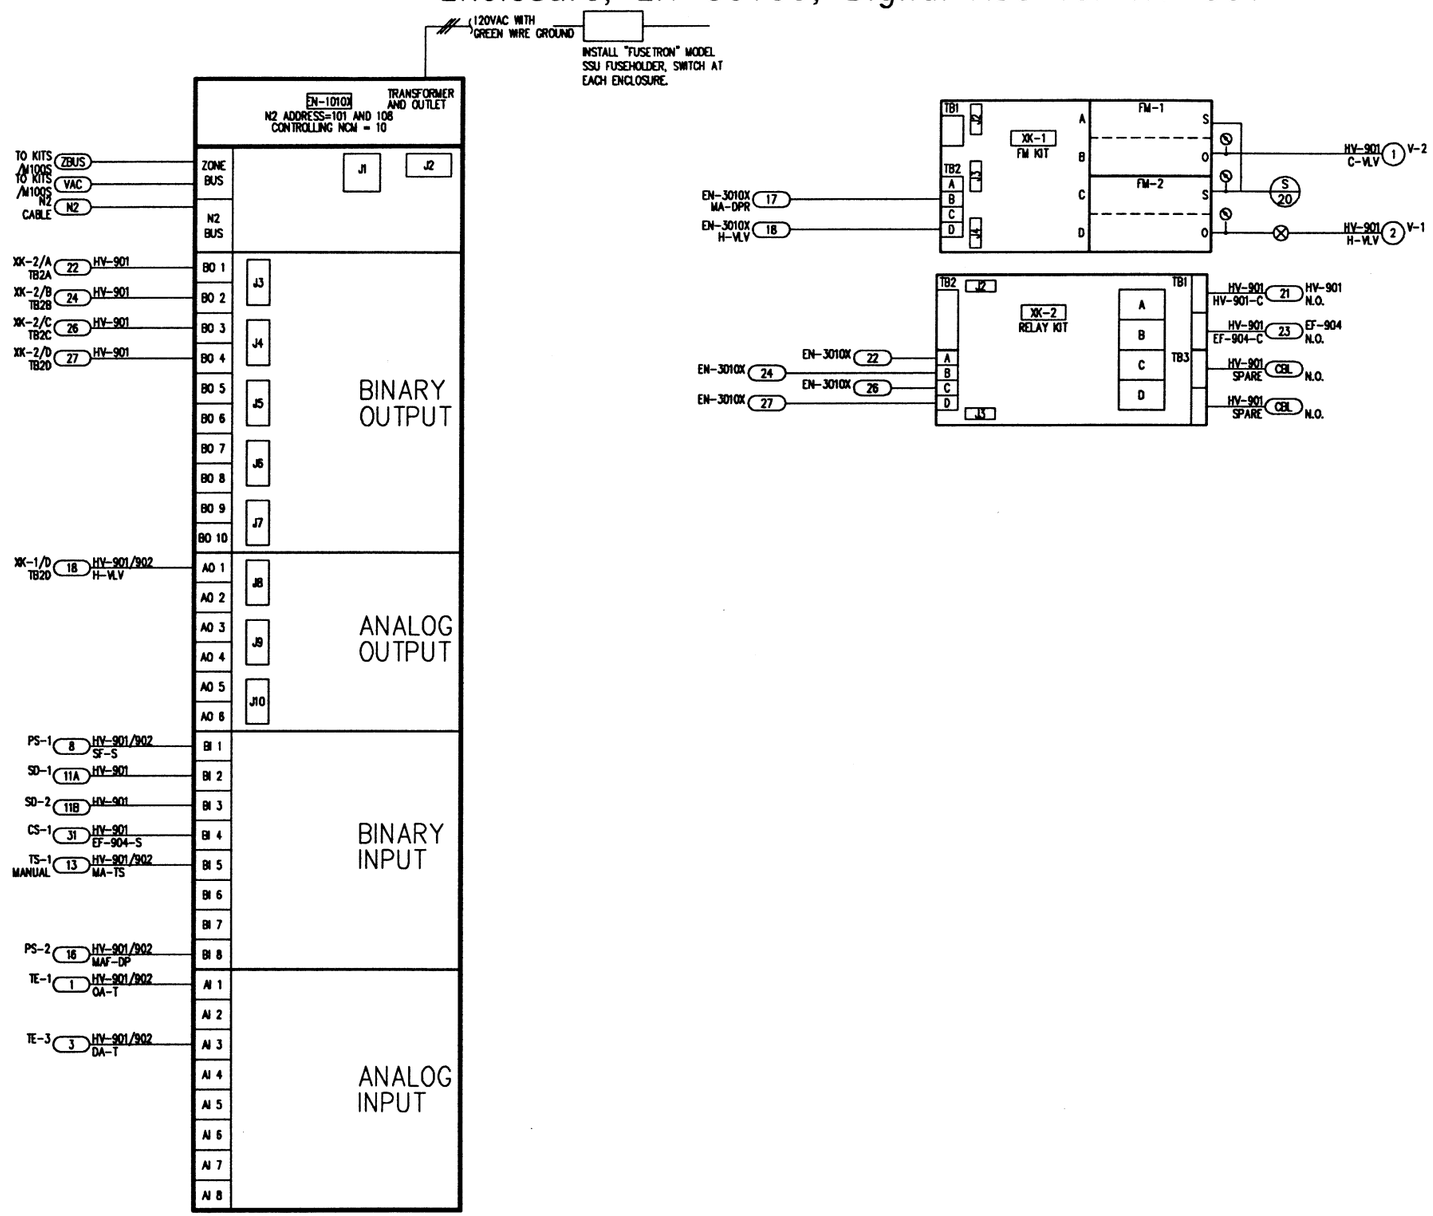

DETAIL, "MUX-1" IS LOCATED ON REFERENCE DETAILS, PAGE 7

PANEL MATERIAL

	DEVICE TAG	QTY	CODE NUMBER	DESCRIPTION
(P)	EN-30100	1	AS-AHU101-0	AIR HANDLING UNIT ENC/TER
		1	AS-XFR100-0	100VA TRANSFORMER KIT
		1	EN-ECW200-0	
(P)	FM-1-2	2	FM-DAP102-0	DAP MANUAL MODULE
		2	FM-DAP103-0	E/P OUT FM FOR ASC
(P)	XX-1	1	AS-FMK100-0	FUNCTION MOD KIT-4 SLOTS
(P)	XX-2	1	AS-RLY100-0	LINE VOLTAGE RELAY KIT
(P)	FM-1	2	FM-KIT127-0	FM BLANK OFF
(P)	ACC	3	G-2010-5	GAUGE
(P)	ACC	1	R-3710-2007	.007 INCH RESTRICTOR

NOTES:

1. ALL MATERIAL WITH (P) PRECEEDING THE DEVICE TAG IN THE BILL OF MATERIAL IS PROPRIETARY AND IS BEING SUPPLIED BY JOHNSON CONTROLS, INC. ALL OTHER MATERIAL IS NON-PROPRIETARY.

PANEL TAG
FOR PNEUMATIC TUBE S/20 "CONTROL AIR SUPPLY PRESSURE"

FOR PNEUMATIC TUBE 1 "COOLING VALVE"

FOR PNEUMATIC TUBE 2 "HEATING VALVE"

FILE: EN-30100

REFERENCE DRAWING	NO.	REVISION-LOCATION	ECN	DATE	BY
		RECORD		05/20/94	SF
	3	GENERAL		12/17/92	SF
	2	GENERAL		10/10/92	SF

SALES ENGR	PROJECT MGR	APPL. ENGR	DRAWN	APPROVED
JP	SF	DCS	BY SF DATE 02/12/92	BY DATE

DRAWING TITLE
Heating/Ventilating Unit,
HV-901, 100 Percent Outside
Air
RF/Extraction

PROJECT
The Argonne National Labs
Advanced Photon Source Campus
9700 Cass Avenue South
Argonne, IL 60439

JOHNSON CONTROLS
Systems & Services Division

3007 MALMO ROAD
ARLINGTON HEIGHTS
ILLINOIS 60005
708/364-1500 Main
708/808-4438 Eng

CONTRACT NUMBER
91390-0009

DRAWING NUMBER
91-9-D-03B

COPYRIGHT JOHNSON CONTROLS, INC. 1993