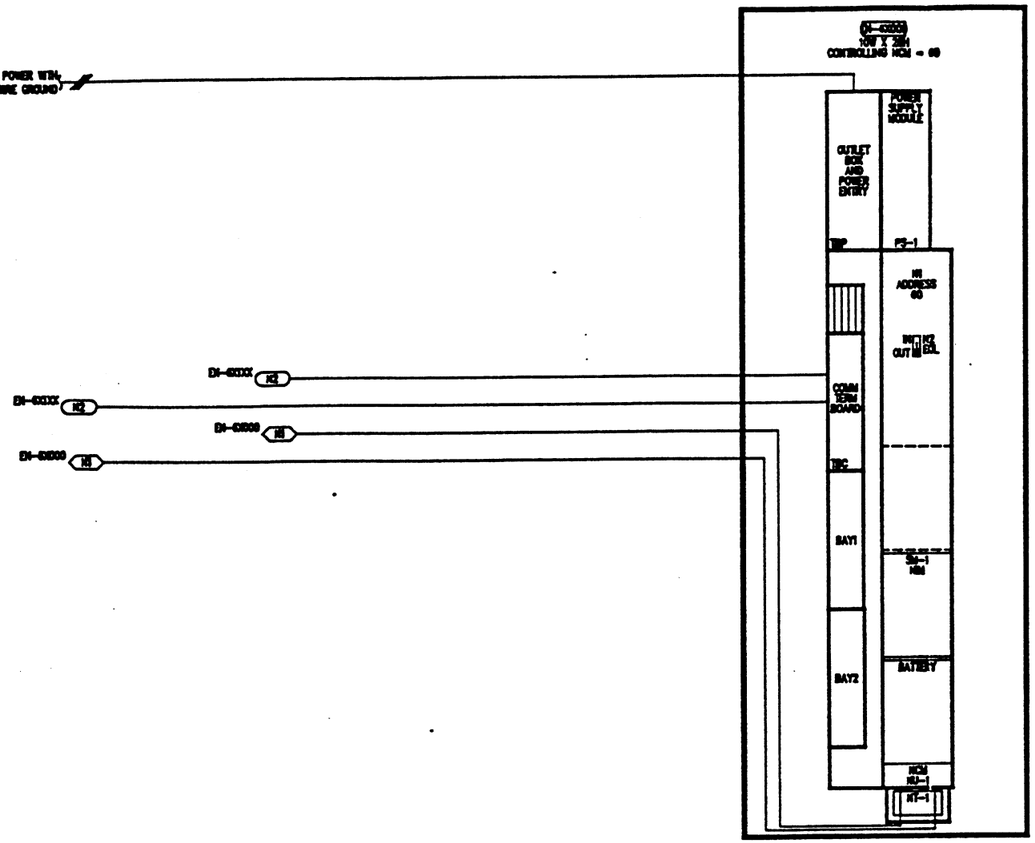

PANEL MATERIAL

DEVICE TAG	QTY	CODE NUMBER	DESCRIPTION
(P) EN-6X000	4	EN-BBF101-0	1 SLOT BASE FRAME
	4	EN-EMC100-0	NCU/NEU 10X28 ENCLOSURE
	4	EN-KEY101-0	MASTER KEYS
(P) NT-1	4	ID-NTU102-0	NETWORK TERMINAL W/LIGHT
	4	EN-KIT103-0	NT CRABLE KIT
(P) NU-1	4	NU-NCM200-0	NETWORK CONTROL MODULE
BNC-1	8	694291	BNC CONNECTOR-ANIXTER
(P) PS-1	4	NU-PWR101-0	POWER SUPPLY
(P) SM-1	4	NU-NIM106-0	IB MODULE (4 X NIM102)
	4	697643	BNC T CONNECTOR-ANIXTER

NOTES:

1. ALL MATERIAL WITH (P) PRECEEDING THE DEVICE TAG IN THE BILL OF MATERIAL IS PROPRIETARY AND IS BEING SUPPLIED BY JOHNSON CONTROLS, INC. ALL OTHER MATERIAL IS NON-PROPRIETARY

NOTE:
BASE JOB EQUALS QUANTITIES IN THE BILL OF MATERIALS DIVIDED BY TWO.
ALTERNATE IS THE QUANTITY AS PRINTED IN THE BILL OF MATERIALS.

BASE JOB IS BUILDINGS 431, 432, 434, 435

Enclosure, EN-6X000, NCU Serving the HVAC Application Specific Controllers in Buildings 431-438

DRAWING TITLE ENCLOSURE EN-6X000 TYPICAL NETWORK CONTROL UNIT FOR ICS NETWORKING OF BUILDING 431-438 ASCs		1	GENERAL		07/06/93 JCS
	REFERENCE DRAWING	NO.	REVISION-LOCATION	ECN	DATE BY
	SALES ENGR JP / PROJECT MGR SF / APPL. ENGR DCS		DRAWN BY DCS DATE 08/17/93	APPROVED BY DATE	
PROJECT The Argonne National Labs Advanced Photon Source Campus 9700 Cass Avenue South Argonne, IL 60439	JOHNSON CONTROLS Systems & Services Division		3007 MALMO ROAD ARLINGTON HEIGHTS ILLINOIS 60005 708/364-1500 Main 708/806-4438 Eng	CONTRACT NUMBER 91390-0009	DRAWING NUMBER 91-9-F-05A

COPYRIGHT JOHNSON CONTROLS, INC. 1993